

HiLook

Great View, Great Value

PRODUCT CATALOG

IP Solution
Turbo HD Solution
Transmission

2019 H1

Table of Contents

HiLook OVERVIEW	01
------------------------	----

KEY FEATURES

5 MP HD RESOLUTION	04
120 DB WDR	06
EXIR	08
H.265+	09
HiLookVision	10
DISCRETE CHANNEL OUTPUT TO TWO MONITORS	12
H.265 PRO+	13
LONG TRANSMISSION DISTANCE	14
SUPERIOR COMPATIBILITY	14
ULTRA-LOW-LIGHT PERFORMANCE	15
PIR DETECTION & STROBE LIGHT ALARMING	15

PRODUCT SHOWCASE

IP SOLUTION	16
TURBO HD SOLUTION	30
TRANSMISSION PRODUCTS	43
ACCESSORIES	45

HiLook



VIDEO SURVEILLANCE SOLUTION

Looking for High Performance? Looking for Low Price? Look at HiLook.

HiLook, Hikvision's offshoot brand, hits the bullseye for the entry-level video surveillance market, providing very cost-effective, easy-to-use and reliable products and services.



DIVERSE PRODUCT LINES FOR VARIOUS DEMANDS


HiLook offers an extensive portfolio of products and solutions to meet the wide range of user demands.

IP Solution: Network Cameras, Network PTZ Cameras, NVRs

Turbo HD Solution: Turbo HD Cameras, Turbo HD PTZ Cameras, Turbo HD DVRs

Transmission: Switches, Coaxial Cables, Network Cables

Expect even more product lines under the HiLook brand in the near future.

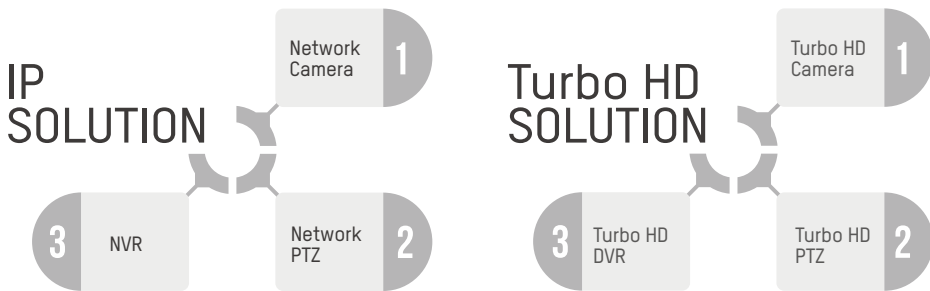



OUTSTANDING PRODUCT QUALITY

The superior cost-efficiency of HiLook products does not imply any compromise in product quality, which are guaranteed by:

- Over 80% automated manufacturing
- Options for more durable materials such as full metal
- Comprehensive authoritative certifications of the industry
- Stringent tests for ingress protection, vandal resistance, aging, etc.

5 MP

SUPER-HIGH DEFINITION RESOLUTION


While most cost-efficient cameras provide 4 MP resolution, HiLook turns the image quality up a notch to a super-HD resolution of 5 MP, with wider coverage, less blind spots, and more details.



5 MP



2 MP

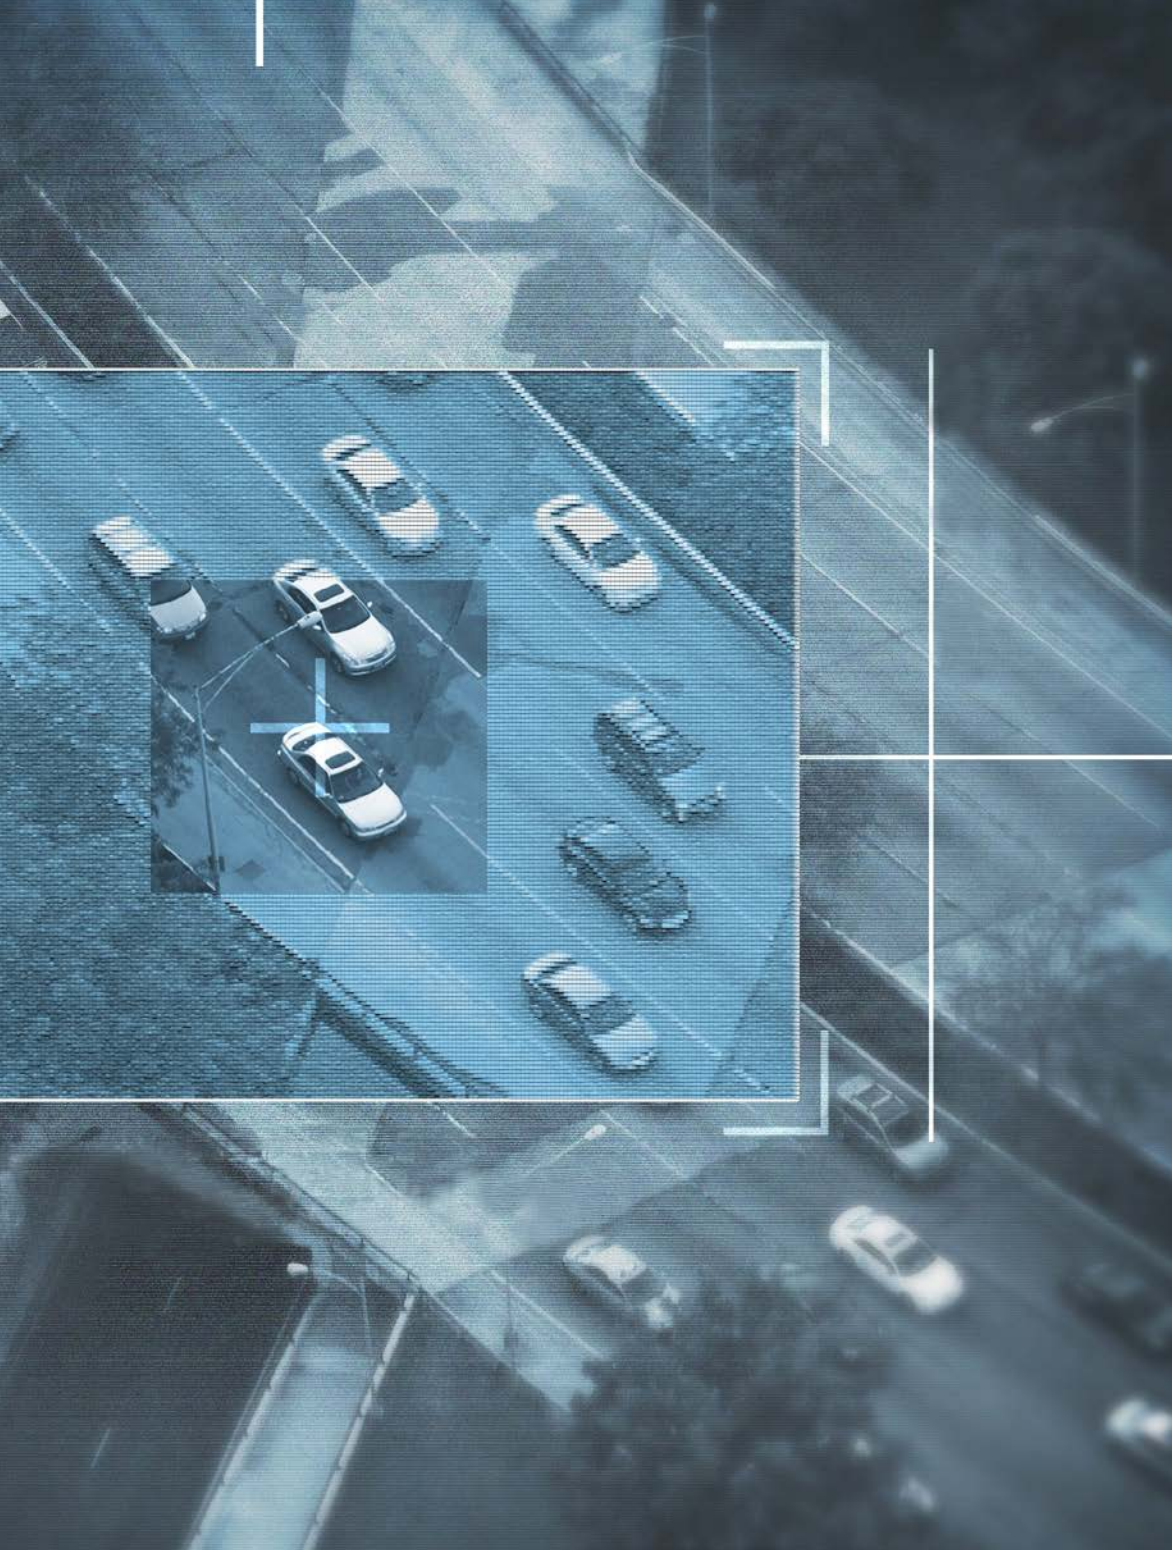

WDR

WIDE DYNAMIC RANGE FOR EXCELLENT IMAGING

Wide Dynamic Range (WDR) technology enables cameras to maintain image fidelity without detail loss when there is harsh backlighting. The 120 dB WDR integrated into HiLook's cameras ensures accurate on-screen color and detail even with backlit environments, where conventional cameras would capture only obscured silhouettes.



WDR off



WDR on



EXIR


EXTENDED INFRARED POWER



For 24-hour surveillance, at night, and in dark environments, infrared technology is essential. Hikvision's EXIR provides a higher luminous efficiency for infrared surveillance, improving images where and when it's critical. The amazing 130-foot (40-meter) range, combined with up to 5 MP super-HD imaging, makes EXIR the ultimate performer in demanding applications.



H.265+

HIKVISION'S OWN HIGH-EFFICIENCY CODEC

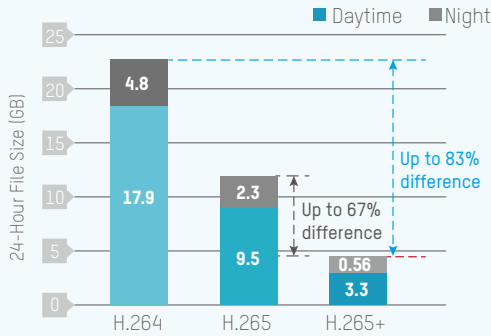


24-Hour recording file size (GB) comparing H.264, H.265, and H.265+

*Data was tested in a common scene; for reference only.

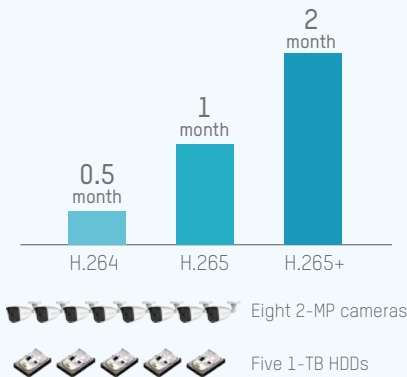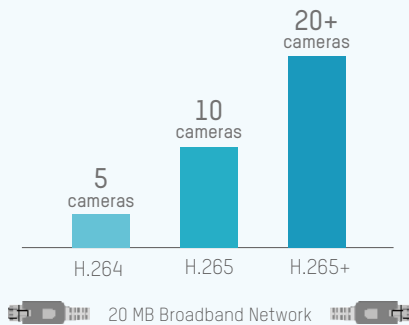

The H.265+ high-efficiency codec not only reduces bandwidth but also decreases storage requirements, improving overall system performance by up to 83%. Compared to H.265, H.265+ can double surveillance recording duration. And compared to H.264, it can support four times the number of video cameras – or more. HiLook saves you time and resources with H.265+.

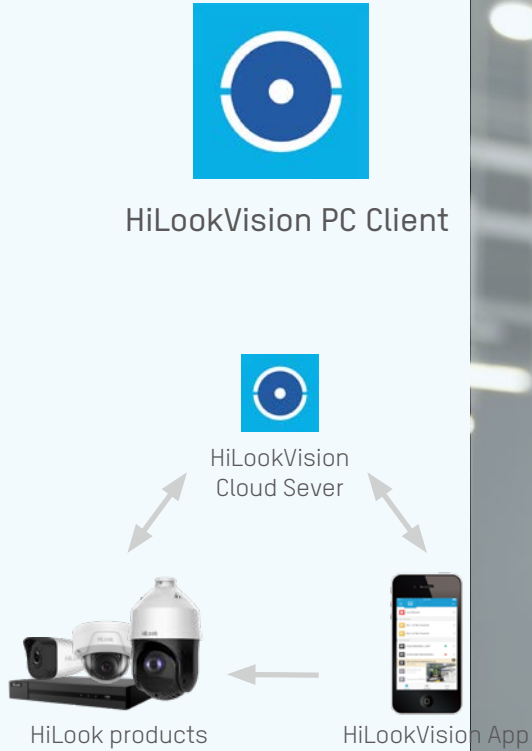

HiLookVision PC Client and the HiLookVision App allow end-users to connect to HiLookVision Cloud Server for powerful device management. Users will enjoy live views from multiple cameras on a PC or via smartphone.

Download and install the HiLookVision app by searching "HiLookVision" in App Store or Google Play.



DISCRETE CHANNEL OUTPUT TO TWO MONITORS



Conventional channel output to one monitor




Discrete channel output to two monitors


Select HiLook NVR models feature separate video channel output to two monitors at the same time through unique interfaces. This ensures monitoring of multiple channels simultaneously, and each channel can be displayed in a sub-window large enough for viewers to clearly see sharp image details.

H.265 Pro+

SUPER COMPRESSIVE VIDEO CODING

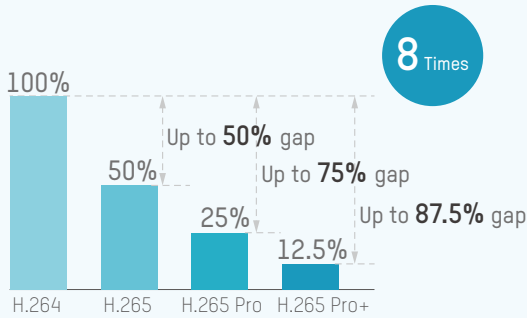

Average 24-Hour recording file size comparing H.264, H.265, H.265 Pro and H.265 Pro+

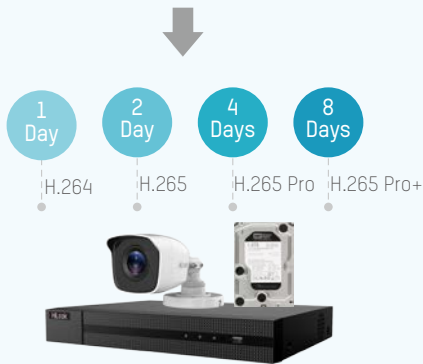

HDD storage time extended eightfold on average

H.265 Pro+, our latest high-efficiency video compression technology, helps users reduce costs on video storage. It has been designed specifically for Turbo HD DVRs.

LONGER TRANSMISSION DISTANCE

As any successful business grows, its need for extended security grows, too. Once a complete system has been installed, it's not very long before it needs to expand. Using our technology, your customers can manage much larger projects or extend existing ones with HD video while simultaneously increasing their transmission range. Users immediately find an increased transmission distance – up to nearly 4,000 feet (1,200 m) using existing coaxial cable. The full value of the user's investment comes with HD 720p resolution, resulting in upgrades in both video quality and transmission distance at the same time.


**The maximum transmission distance is 2,625 feet (800 m) with HD 1080p resolution.*




SUPERIOR COMPATIBILITY

Wide compatibility with various components is critical to customers. That's why HiLook has been designed to work with an extensive range of products for a multitude of application possibilities.

4 in 1
switchable
output

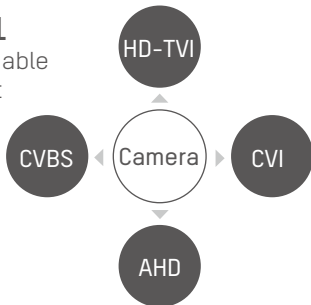

5 in 1
self-adaptive
input

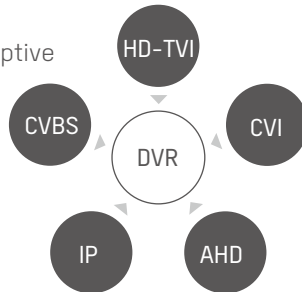

ULTRA-LOW-LIGHT PERFORMANCE

That dimly lit environment is no longer a problem with Hikvision's industry-leading, ultra-low-light technology, ensuring rich and colorful images in low-light scenarios – even down to 0.005 lux.



Camera with ultra-low-light technology



Cellphone

PIR DETECTION AND STROBE LIGHT ALARMING

The passive infrared (PIR) sensor in front-end devices detects movements with better accuracy. False alarms triggered by rain, spider webs, or foliage can be greatly reduced in the back-end devices. Upon detection of a true intrusion, a strobe light alarm is immediately triggered to ward off any would-be intruders. As the intruder turns to see the sudden light – a universal human reaction – facial information can be captured.



IP SOLUTION

With an incredible cost-to-performance ratio, the HiLook Series boasts the most advanced features for the price: the H.265+ high-efficiency codec for maximum bandwidth and data storage efficiency, up to 5 MP super-high-definition imaging, EXIR 2.0 for higher infrared luminous efficiency, and wide dynamic range to balance color and brightness under harsh lighting conditions. HiLook is a whole new look for high-performance, cost-effective video surveillance for small-to-medium business applications.





IPC-B150H-M
5 MP IR Fixed Bullet
Network Camera

- Up to 5 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Metal



IPC-B150H
5 MP IR Fixed Bullet
Network Camera **HOT**

- Up to 5 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Plastic



IPC-B140H-M
4 MP IR Fixed Bullet
Network Camera **HOT**

- Up to 4 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Metal



IPC-B140H
4 MP IR Fixed Bullet
Network Camera **HOT**

- Up to 4 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Plastic



IPC-B120H-M
2 MP IR Fixed Bullet
Network Camera

- Up to 2 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Metal



IPC-B120H-U
2 MP IR Fixed Bullet
Network Camera **NEW**

- Up to 2 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP66, DWDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Plastic
- Audio: Built-in Microphone



IPC-B121H-M
2 MP IR Fixed Bullet
Network Camera

- Up to 2 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Metal



IPC-B121H
2 MP IR Fixed Bullet
Network Camera

HOT

- Up to 2 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265, H.264
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Plastic



IPC-B100-M
1 MP IR Fixed Bullet
Network Camera

- Up to 1 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.264
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Metal



IPC-B100
1 MP IR Fixed Bullet
Network Camera

- Up to 1 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.264
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Plastic



IPC-D150H-M
5 MP IR Fixed Dome
Network Camera

- Up to 5 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, IK10, 120 dB WDR
- Supports PoE
- Base: Metal, Cover: Metal



IPC-D150H
5 MP IR Fixed Dome
Network Camera

HOT

- Up to 5 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, IK10, 120 dB WDR
- Supports PoE
- Base: Metal, Cover: Plastic



IPC-D140H-M
4 MP IR Fixed Dome
Network Camera

HOT

- Up to 4 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, IK10, 120 dB WDR
- Supports PoE
- Base: Metal, Cover: Metal



IPC-D140H
4 MP IR Fixed Dome
Network Camera

HOT

- Up to 4 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265/H.265+, H.264/H.264+
- IR Range: Up to 30 m
- IP67, IK10, 120 dB WDR
- Supports PoE
- Base: Metal, Cover: Plastic



IPC-D120H-M
2 MP IR Fixed Dome
Network Camera

- Up to 2 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, IK10, DWDR
- Supports PoE
- Base: Metal, Cover: Metal



IPC-D120H
2 MP IR Fixed Dome
Network Camera

- Up to 2 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, IK10, DWDR
- Supports PoE
- Base: Metal, Cover: Plastic



IPC-D121H-M
2 MP IR Fixed Dome
Network Camera

- Up to 2 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, IK10, DWDR
- Supports PoE
- Base: Metal, Cover: Metal



IPC-D121H
2 MP IR Fixed Dome
Network Camera

HOT

- Up to 2 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265, H.264
- IR Range: Up to 30 m
- IP67, IK10, DWDR
- Supports PoE
- Base: Metal, Cover: Plastic



IPC-D100-M
1 MP IR Fixed Dome
Network Camera

- Up to 1 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.264
- IR Range: Up to 30 m
- IP67, IK10, DWDR
- Supports PoE
- Base: Metal, Cover: Metal



IPC-D100
1 MP IR Fixed Dome
Network Camera

- Up to 1 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.264
- IR Range: Up to 30 m
- IP67, IK10, DWDR
- Supports PoE
- Base: Metal, Cover: Plastic



IPC-T250H HOT
5 MP IR Fixed Turret
Network Camera

- Up to 5 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Camera body: Metal, Bottom base: Plastic



IPC-T240H HOT
4 MP IR Fixed Turret
Network Camera

- Up to 4 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265/H265+, H.264/H.264+
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Camera body: Metal, Bottom base: Plastic



IPC-T220H-U NEW
2 MP IR Fixed Turret
Network Camera

- Up to 2 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- IR Range: Up to 30 m
- IP66, DWDR
- Supports PoE
- Camera body: Metal, Bottom base: Plastic
- Audio: Built-in Microphone



IPC-T221H HOT
2 MP IR Fixed Bullet
Network Camera

- Up to 2 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.265/H.264
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE
- Camera body: Metal, Bottom base: Plastic



IPC-T200
1 MP IR Fixed Turret
Network Camera

- Up to 1 MP high resolution
- 2.8/4 mm fixed lens
- Supports H.264
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE
- Camera body: Metal, Bottom base: Plastic



IPC-B650H-V/Z
5 MP IR VF Bullet
Network Camera

- Up to 5 MP high resolution
- 2.8-12 mm VF lens
- Supports H.265/H.265+, H.264/H.264+
- IP67, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens,
- -Z: motorized vari-focal lens
- Base: Metal, Cover: Plastic



IPC-B640H-V/Z
4 MP IR VF Bullet
Network Camera

HOT

- Up to 4 MP high resolution
- 2.8-12 mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP67, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens
- Base: Metal, Cover: Plastic



IPC-B620H-V/Z
2 MP IR VF Bullet
Network Camera

HOT

- Up to 2 MP high resolution
- 2.8-12 mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP67, DWDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens
- Base: Metal, Cover: Plastic



IPC-B621H-V/Z
2 MP IR VF Bullet
Network Camera

NEW

- Up to 2 MP high resolution
- 2.8-8 mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP66, DWDR
- IR Range: Up to 20 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens
- Front & Back cover: Metal
- Audio: Built-in Microphone



IPC-D650H-V/Z
5 MP IR VF Dome
Network Camera

- Up to 5 MP high resolution
- 2.8-12 mm VF lens
- Supports H.265/H.265+, H.264/H.264+
- IP67, IK10, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens,
- -Z: motorized vari-focal lens
- Bubble: Plastic, Base: Metal, Cover: Metal



IPC-D640H-V/Z
4 MP IR VF Dome
Network Camera

HOT

- Up to 4 MP high resolution
- 2.8-12 mm VF lens
- Supports H.265/H.265+, H.264/H.264+
- IP67, IK10, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens
- Bubble: Plastic, Base: Metal, Cover: Metal



IPC-D620H-V/Z
2 MP IR VF Dome
Network Camera

HOT

- Up to 2 MP high resolution
- 2.8-12 mm VF lens
- Supports H.265/H.265+, H.264/H.264+
- IP67, IK10, DWDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens
- Bubble: Plastic, Base: Metal, Cover: Metal



IPC-D720H-V/Z
2 MP IR VF Dome
Network Camera

NEW

- Up to 2 MP high resolution
- 2.8-8 mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP67, DWDR
- IR Range: Up to 20 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens
- Front & Back cover: Metal
- Audio: Built-in Microphone



IPC-T651H-Z
5 MP IR VF Turret
Network Camera

- Up to 5 MP high resolution
- 2.8-12 mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP67, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- Motorized vari-focal lens
- Camera body: Metal, Bottom base: Plastic



IPC-T641H-Z
4 MP IR VF Turret
Network Camera

HOT

- Up to 4 MP high resolution
- 2.8-12 mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP67, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- Motorized vari-focal lens
- Camera body: Metal, Bottom base: Plastic



IPC-T621H-Z
2 MP IR VF Turret
Network Camera

HOT

- Up to 2 MP high resolution
- 2.8-12 mm VF lens
- Supports H.265+/H.265, H.264+/H.264
- IP67, DWDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- Motorized vari-focal lens
- Camera body: Metal, Bottom base: Plastic



IPC-C120-D/W
2 MP IR Fixed Cube
Wi-Fi Camera

- Up to 2 MP high resolution
- 2.8 mm fixed lens
- Supports H.264
- IR Range: Up to 10 m
- DWDR
- Built-in microphone and speaker, supports two-way audio
- Built-in Wi-Fi
- Camera body: Plastic, Bottom base: Plastic



IPC-C100-D/W
1 MP IR Fixed Cube
Wi-Fi Camera

- Up to 1 MP high resolution
- 2.8 mm fixed lens
- Supports H.264
- IR Range: Up to 10 m
- DWDR
- Built-in microphone and speaker, supports two-way audio
- Built-in Wi-Fi
- Camera body: Plastic, Bottom base: Plastic



IPC-C220-D/W
2 MP IR Fixed Cube
Wi-Fi Camera

- Up to 2 MP high resolution
- 2.8 mm fixed lens
- Supports H.264
- IR Range: Up to 10 m
- DWDR
- Built-in microphone and speaker, supports two-way audio
- Built-in Wi-Fi
- Supports PIR (Passive Infrared Detection)
- Camera body: Plastic, Bottom base: Plastic



IPC-C200-D/W
1 MP IR Fixed Cube
Wi-Fi Camera

- Up to 1 MP high resolution
- 2.8 mm fixed lens
- Supports H.264
- IR Range: Up to 10 m
- DWDR
- Built-in microphone and speaker, supports two-way audio
- Built-in Wi-Fi
- Supports PIR (Passive Infrared Detection)
- Camera body: Plastic, Bottom base: Plastic



IPC-P120-D/W
2 MP IR Fixed PT
Wi-Fi Camera

- Up to 2 MP high resolution
- 2.8 mm fixed lens
- Supports H.264
- IR Range: Up to 5 m
- DWDR
- Built-in microphone and speaker, supports two-way audio
- Built-in Wi-Fi
- Camera body: Plastic, Bottom base: Plastic



IPC-P100-D/W
1 MP IR Fixed PT
Wi-Fi Camera

- Up to 1 MP high resolution
- 2.8 mm fixed lens
- Supports H.264
- IR Range: Up to 5 m
- DWDR
- Built-in microphone and speaker, supports two-way audio
- Built-in Wi-Fi
- Camera body: Plastic, Bottom base: Plastic



IPC-B120-D/W
2 MP IR Fixed Bullet
Wi-Fi Camera

NEW

- Up to 2 MP high resolution
- 2.8 mm fixed lens
- Supports H.264+ /H.264
- IR Range: Up to 30 m
- IP66, DWDR
- Built-in Wi-Fi
- Front Cover: Metal
- Back Cover & Bracket: Plastic



PTZ-P332ZI-DE3
PanoVu Mini Series
EXIR Network PTZ
Camera

- 3 × 2 MP panoramic images, PTZ: 4× optical zoom
- Color: 0.05 Lux @F2.0, B/W: 0.01 Lux @F2.0
- Supports H.265
- DWDR
- IR: Up to 10 m
- 12 VDC & PoE+



PTZ-N4225I-DE
2 MP 25X 4 inch EXIR
PTZ Network Camera

- Up to 2 MP high definition, 25x optical zoom
- Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+ /H.265
- IP66, 120 dB WDR
- IR: 100 m
- 12 VDC & PoE+



PTZ-N4215I-DE
2 MP 15x 4 inch EXIR
PTZ Network Camera

- Up to 2 MP high definition, 15x optical zoom
- Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+ /H.265
- IP66, 120 dB WDR
- IR: 100 m
- 12 VDC & PoE+



PTZ-N2404I-DE3
4 MP 4× EXIR
Network PTZ Camera

HOT

- Up to 4 MP high definition, 4× optical zoom
- Color: 0.005 Lux @F1.6, B/W: 0.001 Lux @F1.6
- Supports H.265+ /H.265
- IP66, IK10, 120 dB WDR
- IR: Up to 20 m
- 12 VDC & PoE



PTZ-N2204I-DE3
2 MP 4× EXIR
Network PTZ Camera

HOT

- Up to 2 MP high definition, 4× optical zoom
- Color: 0.005 Lux @F1.6, B/W: 0.001 Lux @F1.6
- Supports H.265+ /H.265
- IP66, IK10, 120 dB WDR
- IR: Up to 20 m
- 12 VDC & PoE



PTZ-N1200I-DE3 HOT
 2 MP IR Network PTZ
 Camera

- Up to 2 MP high definition
Color: 0.005 Lux @F1.6,
B/W: 0.001 Lux @F1.6"
- Supports H.265+/H.265
- IP66, 120 dB WDR
- IR: Up to 15 m
- 12 VDC & PoE



PTZ-N1400I-DE3 HOT
 4 MP IR Network PTZ
 Camera

- Up to 4 MP high definition
Color: 0.005 Lux @F1.6,
B/W: 0.001 Lux @F1.6"
- Supports H.265+/H.265
- IP66, 120 dB WDR
- IR: Up to 15 m
- 12 VDC & PoE



PTZ-N4215-DE3
 2 MP 15x 4 inch PTZ
 Network Camera

- Up to 2 MP high definition, 15x optical zoom
Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @
F1.6
- Supports H.265+/H.265
- 120 dB WDR
- 12 VDC & PoE+



NVR-216MH-C/16P
 16-ch 2 HDD Network
 Video Recorder

- 160 Mbps input max.; up to 16 ch. IP camera
input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 2 SATA interface, up to 6TB
- Supports 16 PoE interfaces
- Standalone 1U case (Metal)



NVR-216MH-C
 16-ch 2 HDD Network
 Video Recorder

- 160 Mbps input max.; up to 16 ch. IP camera
input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 2 SATA interface, up to 6TB
- Standalone 1U case (Metal)



NVR-208MH-C/8P
 8-ch 2 HDD Network
 Video Recorder

- 80 Mbps input max.; up to 8 ch. IP camera
input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 2 SATA interface, up to 6TB
- Supports 8 PoE interfaces
- Standalone 1U case (Metal)



NVR-208MH-C
8-ch 2 HDD Network
Video Recorder

- 80 Mbps input max.; up to 8 ch. IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 2 SATA interface, up to 6TB
- Standalone 1U case (Metal)



NVR-116MH-C
16-ch 1 HDD
Network Video
Recorder

- 160 Mbps input max.; up to 16 ch. IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Standalone 1U case (Metal)



NVR-108MH-C/8P
8-ch 1 HDD 8 PoE
Network Video
Recorder

- 80 Mbps input max., up to 8 ch. of IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Supports 8 PoE interfaces
- Standalone 1U case (Metal)



NVR-108MH-C
8-ch 1 HDD Network
Video Recorder`

- 80 Mbps input max., up to 8 ch. of IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Standalone 1U case (Metal)



NVR-104MH-C/4P
4-ch 1 HDD 4 PoE
Network Video
Recorder

- 40 Mbps input max.; up to 4 ch. of IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Supports 4 PoE interfaces
- Standalone 1U case (Metal)



NVR-104MH-C
4-ch 1 HDD Network
Video Recorder

- 40 Mbps input max., up to 4 ch. of IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Standalone 1U case (Metal)



NVR-108MH-D/8P
8-ch 1 HDD Network
Video Recorder

HOT

- 60 Mbps input max.; up to 8 ch. IP camera input
- 1-ch @ 4 MP / 2-ch @ 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Supports 8 PoE interfaces
- 260 1U case (Metal)



NVR-108MH-D
8-ch 1 HDD Network
Video Recorder

HOT

- 60 Mbps input max.; up to 8 ch. IP camera input
- 1-ch @ 4 MP / 2-ch @ 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- 260 1U case (Metal)



NVR-104MH-D/4P
4-ch 1 HDD Network
Video Recorder

HOT

- 40 Mbps input max.; up to 4 ch. IP camera input
- 4-ch 1 HDD Network Video Recorder
- 1-ch @ 4 MP / 2-ch @ 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Supports 4 PoE interfaces
- 260 1U case (Metal)



NVR-104MH-D
4-ch 1 HDD Network
Video Recorder

HOT

- 40 Mbps input max.; up to 4 ch. IP camera input
- 1-ch @ 4 MP / 2-ch @ 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- 260 1U case (Metal)



NVR-108H-D/8P
8-ch 1 HDD Network
Video Recorder

- 60 Mbps input max.; up to 8 ch. IP camera input
- 1-ch @ 4 MP / 2-ch @ 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Supports 8 PoE interfaces
- Mini 1U Case (Plastic)



NVR-108H-D
8-ch 1 HDD Network
Video Recorder

- 60 Mbps input max.; up to 8 ch. IP camera input
- 1-ch @ 4 MP / 2-ch @ 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Mini 1U Case (Plastic)



NVR-104H-D/4P
4-ch 1 HDD Network
Video Recorder

- 40 Mbps input max.; up to 4 ch. IP camera input
- 1-ch @ 4 MP / 2-ch @ 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Supports 4 PoE interfaces
- Mini 1U Case (Plastic)



NVR-104H-D
4-ch 1 HDD Network
Video Recorder

- 40 Mbps input max.; up to 4 ch. IP camera input
- 1-ch @ 4 MP / 2-ch @ 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Mini 1U Case (Plastic)



NVR-104MH-D/W
4-ch 1 HDD Wi-Fi
Video Recorder

HOT

- 50 Mbps input max.; up to 4 ch. IP camera input
- 1-ch @ 4 MP / 2-ch @ 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- 260 1U case (Metal)



NVR-108MH-D/W
8-ch 1 HDD Wi-Fi
Video Recorder

NEW

- 50 Mbps input max.; up to 8 ch. IP camera input
- 1-ch @ 4 MP / 2-ch @ 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- 260 1U case (Metal)



IK-4142BH-MH/P

- NVR: 4-ch 1 HDD Network Video Recorder
- IPC: 4 * 2 MP IR Fixed Bullet Network Camera
- Cable: 4 * 18 m network cable cat5e, 1 pcs 2 m network cable cat5e, 1 pcs 2 m HDMI cable
- HDD: 1TB
- Supports 4 PoE interfaces
- Supports H.265/H.264



NEW

IK-4042BH-MH/P

- NVR: 4-ch Netwrok Video Recorder
- IPC: 4 * 2 MP IR Fixed Bullet Network Camera
- Cable: 4 * 18 m network cable cate5e, 1 pcs 2 m network cable cate5e, 1 pcs 2 m HDMI cable
- Supports 4 PoE interfaces
- Supports H.265/H.264



IK-4142TH-MH/P

- NVR: 4-ch 1 HDD Network Video Recorder
- IPC: 4 * 2 MP IR Fixed Turret Network Camera
- Cable: 4 * 18 m network cable cat5e, 1 pcs 2 m network cable cat5e, 1 pcs 2 m HDMI cable
- HDD: 1TB
- Supports 4 PoE interfaces
- Supports H.265/H.264



NEW

IK-4042TH-MH/P

- NVR: 4-ch Netwrok Video Recorder
- IPC: 4 * 2 MP IR Fixed Turret Network Camera
- Cable: 4 * 18 m network cable cate5e, 1 pcs 2 m network cable cate5e, 1 pcs 2 m HDMI cable
- Supports 4 PoE interfaces
- Supports H.265/H.264



HOT

IK-4142B-MH/W

- NVR: 4-ch 1 HDD Wi-Fi Video Recorder
- IPC: 4 * 2 MP IR Fixed Bullet Wi-Fi Camera
- Cable: 1 pcs 2 m network cable cat5e, 1 pcs 2 m HDMI cable
- HDD: 1TB

TURBO HD SOLUTION

With an incredible cost-to-performance ratio, the HiLook Series boasts the most advanced features for the price, such as the H.265 Pro+ high-efficiency codec for maximum bandwidth and data storage efficiency, up to 5 MP super-high-definition imaging, EXIR for higher infrared luminous efficiency, superior imaging performance in as little light as 0.005 lux, and PIR detection with strobe light alarm. HiLook is a whole new look for high-performance, cost-effective video surveillance for small-to-medium business applications.





THC-B123-P
2 MP Mini Bullet
Turbo HD Camera

HOT

- 2 MP CMOS Sensor
- Outdoor EXIR Bullet
- 30 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-B123-M
2 MP Mini Bullet
Turbo HD Camera

HOT

- 2 MP CMOS Sensor
- Outdoor EXIR Bullet
- 30 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-B223
2 MP Bullet Turbo HD
Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Bullet
- 50 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-B223-M
2 MP Bullet Turbo HD
Camera

HOT

- 2 MP CMOS Sensor
- Outdoor EXIR Bullet
- 50 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-T123-P
2 MP Mini Turret
Turbo HD Camera

- 2 MP CMOS Sensor
- Indoor EXIR Turret
- 30 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-T123
2 MP Mini Turret
Turbo HD Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Turret
- 30 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-T123-M
2 MP Mini Turret
Turbo HD Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Turret
- 30 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-T223-P
2 MP Turret Turbo HD
Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Turret
- 50 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-T223-M
2 MP Turret Turbo HD
Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Turret
- 50 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-T323-Z
2 MP Turret Turbo HD
Camera

- 2 MP CMOS Sensor,
- EXIR Turret
- 70 m IR, ICR, 0.005 Lux/F1.2,
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu, Auto Focus
- IP66, 2.7-13.5 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal

HOT



THC-B323-Z
2 MP Bullet Turbo HD
Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Bullet
- 70 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu, Auto Focus
- IP66, 2.7-13.5 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-D323-Z
2 MP Dome Turbo HD
Camera

- 2 MP CMOS Sensor
- EXIR Dome
- 70 m IR, ICR, 0.005 Lux/F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu, Auto Focus
- IP66, IK10, 2.7-13.5 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal

HOT

HOT



THC-B120-MPIRL **HOT**
2 MP Mini Bullet
Turbo HD Camera

- Outdoor EXIR Bullet
- PIR detection, Strobe Light Alarm
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, OSD Menu
- IP66, 2.8/3.6 mm lens
- Material: Metal



THC-B140-M **HOT**
4 MP Mini Bullet
Turbo HD Camera

- 4 MP CMOS Sensor
- EXIR Bullet
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-B120-M **HOT**
2 MP Mini Bullet
Turbo HD Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Bullet
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-B110-M
1 MP Mini Bullet
Turbo HD Camera

- 1 MP CMOS Sensor
- Outdoor EXIR Bullet
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-B140-P **HOT**
4 MP Mini Bullet
Turbo HD Camera

- 4 MP CMOS Sensor
- EXIR Bullet
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-B120-P(B) **HOT**
2 MP Mini Bullet
Turbo HD Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Bullet
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-B110-P(B)
1 MP Mini Bullet
Turbo HD Camera

- 1 MP CMOS Sensor
- Outdoor EXIR Bullet
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-B240 HOT
4 MP Bullet Turbo HD
Camera

- 4 MP CMOS Sensor
- EXIR Bullet
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-B220 HOT
2 MP Bullet Turbo HD
Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Bullet
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-B210
1 MP Bullet Turbo HD
Camera

- 1 MP CMOS Sensor
- Outdoor EXIR Bullet
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-B240-M HOT
4 MP Bullet Turbo HD
Camera

- 4 MP CMOS Sensor
- EXIR Bullet
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-B220-M HOT
2 MP Bullet Turbo HD
Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Bullet
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-B210-M
1 MP Bullet Turbo HD
Camera

- 1 MP CMOS Sensor
- Outdoor EXIR Bullet
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-B340-VF **HOT**
4 MP Bullet Turbo HD
Camera

- 4 MP CMOS Sensor
- EXIR Bullet
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8-12 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-B320-VF **HOT**
2 MP Bullet Turbo HD
Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Bullet
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8-12 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-B310-VF
1 MP Bullet Turbo HD
Camera

- 1 MP CMOS Sensor
- Outdoor EXIR Bullet
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8-12 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-D340-VF **HOT**
4 MP Doom Turbo HD
Camera

- 4 MP CMOS Sensor
- EXIR Dome
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, IK10, 2.8-12 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-D320-VF **HOT**
2 MP Doom Turbo HD
Camera

- 2 MP CMOS Sensor
- EXIR Dome
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, IK10, 2.8-12 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-D310-VF
1 MP Doom Turbo HD
Camera

- 1 MP CMOS Sensor
- EXIR Dome
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, IK10, 2.8-12 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-T140 HOT
4 MP Mini Turret
Turbo HD Camera

- 4 MP CMOS Sensor
- EXIR Turret
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-T120 HOT
2 MP Mini Turret
Turbo HD Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Turret
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-T110
1 MP Mini Turret
Turbo HD Camera

- 1 MP CMOS Sensor
- Outdoor EXIR Turret
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-T140-P HOT
4 MP Mini Turret
Turbo HD Camera

- 4 MP CMOS Sensor
- Indoor EXIR Turret
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-T120-P HOT
2 MP Mini Turret
Turbo HD Camera

- 2 MP CMOS Sensor
- Indoor EXIR Turret
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-T110-P
1 MP Mini Turret
Turbo HD Camera

- 1 MP CMOS Sensor
- Indoor EXIR Turret
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-T140-M **HOT**
4 MP Mini Turret
Turbo HD Camera

- 4 MP CMOS Sensor
- EXIR Turret
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-T120-M **HOT**
2 MP Mini Turret
Turbo HD Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Turret
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-T110-M
1 MP Mini Turret
Turbo HD Camera

- 1 MP CMOS Sensor
- Outdoor EXIR Turret
- 20 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-T240-M **HOT**
4 MP Turret Turbo HD
Camera

- 4 MP CMOS Sensor
- EXIR Turret
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-T220-M **HOT**
2 MP Turret Turbo HD
Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Turret
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-T210-M
1 MP Turret Turbo HD
Camera

- 1 MP CMOS Sensor
- Outdoor EXIR Turret
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal



THC-T240-P HOT
4 MP Turret Turbo HD
Camera

- 4 MP CMOS Sensor
- EXIR Turret
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-T220-P HOT
2 MP Turret Turbo HD
Camera

- 2 MP CMOS Sensor
- Outdoor EXIR Turret
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-T210-P
1 MP Turret Turbo HD
Camera

- 1 MP CMOS Sensor
- Outdoor EXIR Turret
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8/3.6/6 mm lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Plastic



THC-T340-VF HOT
4 MP Turret Turbo HD
Camera

- 4 MP CMOS Sensor,
- EXIR Turret,
- 40 m IR, ICR, 0.01 Lux/F1.2,
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu,
- IP66, 2.8-12 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-T320-VF HOT
2 MP Turret Turbo HD
Camera

- 2 MP CMOS Sensor,
- EXIR Turret,
- 40 m IR, ICR, 0.01 Lux/F1.2,
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu,
- IP66, 2.8-12 mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



THC-T310-VF
1 MP Turret Turbo HD
Camera

- 1 MP CMOS Sensor
- EXIR Turret
- 40 m IR, ICR, 0.01 Lux/F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, 2.8-12mm Vari Focal Lens
- Supports HD-TVI/AHD/CVI/CVBS video output
- Material: Metal & Plastic



PTZ-T4225I-D
2 MP 25x IR Turbo
4-Inch Speed Dome

- Up to 2 MP high definition, 25x optical zoom
- Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @F1.6
- IP66, 120 dB WDR
- IR: 100 m, 12 VDC
- 8 privacy masks



PTZ-T4215I-D
2 MP 15x IR Turbo
4-Inch Speed Dome

- Up to 2 MP high definition, 15x optical zoom
- Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @F1.6
- IP66, 120 dB WDR
- IR: 100 m, 12 VDC
- 8 privacy masks



PTZ-T4215-D3
2 MP 15x Turbo
4-Inch Speed Dome

- Up to 2 MP high definition, 15x optical zoom
- Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @F1.6
- 120 dB WDR
- 12 VDC
- 8 privacy masks



DVR-204U-K1 HOT
4-ch 1 HDD DVR

- 4-ch HD-TVI/AHD/CVI/CVBS video
- Up to 8 channels of IP video input (up to HD 8 MP resolution)
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
- HD 5 MP @ 12 fps/ch
- 260 1U



DVR-208U-K1 HOT
8-ch 1 HDD DVR

- 8-ch HD-TVI/AHD/CVI/CVBS video
- Up to 16 channels of IP video input (up to HD 8 MP resolution)
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
- HD 8 MP @ 8 fps/ch
- 260 1U



DVR-216U-K2
16-ch 2HDD DVR

HOT

- 16-ch HD-TVI/AHD/CVI/CVBS video
- Up to 32 channels of IP video input (up to HD 8 MP resolution)
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
- HD 8 MP @ 8 fps/ch
- 380 1U



DVR-204Q-K1
4-ch 1 HDD DVR

HOT

- 4-ch HD-TVI/AHD/CVI/CVBS video
- Up to 6 channels of IP video input (up to HD 6 MP resolution)
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
- HD 4 MP Lite @ 15 fps/ch
- 260 1U



DVR-208Q-K1
8-ch 1 HDD DVR

HOT

- 8-ch HD-TVI/AHD/CVI/CVBS video
- Up to 12 channels of IP video input (up to HD 6 MP resolution)
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
- HD 4 MP Lite @ 15 fps/ch
- 260 1U



DVR-208Q-K2
8-ch 2HDD DVR

- 8-ch HD-TVI/AHD/CVI/CVBS video
- Up to 12 channels of IP video input (up to HD 6 MP resolution)
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
- HD 4 MP Lite @ 15 fps/ch
- 380 1U



DVR-216Q-K1
16-ch 1 HDD DVR

HOT

- 16-ch HD-TVI/AHD/CVI/CVBS video
- Up to 24 channels of IP video input (up to HD 6 MP resolution)
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
- HD 4 MP Lite @ 15 fps/ch
- 260 1U



DVR-216Q-K2
16-ch 2HDD DVR

- 16-ch HD-TVI/AHD/CVI/CVBS video
- Up to 24 channels of IP video input (up to HD 6 MP resolution)
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
- HD 4 MP Lite @ 15 fps/ch
- 380 1U



DVR-224Q-K2
24-ch 2HDD DVR

- 24-ch HD-TVI/AHD/CVI/CVBS video
- Up to 26 channels of IP video input (up to HD 4 MP resolution)
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
- HD 4 MP Lite @ 15 fps/ch
- 380 1U



DVR-232Q-K2
32-ch 2HDD DVR

HOT

- 32-ch HD-TVI/AHD/CVI/CVBS video
- Up to 34 channels of IP video input (up to HD 4 MP resolution)
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
- HD 4 MP Lite @ 15 fps/ch
- 380 1U



DVR-204G-F1
4-ch 1 HDD DVR

HOT

- 4-ch HD-TVI/AHD/CVI/CVBS video & 1-ch audio input
- Up to 5 channels of IP video input (up to HD 960p resolution)
- 1 SATA interface, HD 1080p Lite @ 25 fps/ch
- 260 1U case



DVR-208G-F1
8-ch 1 HDD DVR

HOT

- 8-ch HD-TVI/AHD/CVI/CVBS video & 1-ch audio input
- Up to 10 channels of IP video input (up to HD 960p resolution)
- 1 SATA interface, HD 1080p Lite @ 12 fps/ch
- 260 1U case



DVR-216G-F1
16-ch 1 HDD DVR

HOT

- 16-ch HD-TVI/AHD/CVI/CVBS video & 1-ch audio input
- Up to 18 channels of IP video input (up to HD 960p resolution)
- 1 SATA interface, HD 1080p Lite @ 12 fps/ch
- 260 1U case



DVR-216G-K1
16-ch 1 HDD DVR

NEW

- 16-ch HD-TVI/AHD/CVI/CVBS video & 1-ch audio input
- Up to 18 channels of IP video input (up to 5 MP resolution)
- 1 SATA interface, HD 1080p Lite @ 15 fps/ch
- 260 1U case



DVR-216G-K2
16-ch 2 HDD DVR

NEW

- 16-ch HD-TVI/AHD/CVI/CVBS video & 1-ch audio input
- Up to 18 channels of IP video input (up to 5 MP resolution)
- 2 SATA interface, HD 1080p Lite @ 15 fps/ch
- 380 1U case



DVR-224G-K2
24-ch 2 HDD DVR

NEW

- 24-ch HD-TVI/AHD/CVI/CVBS video & 1-ch audio input
- Up to 18 channels of IP video input (up to 5 MP resolution)
- 2 SATA interface, HD 1080p Lite @ 15 fps/ch
- 380 1U case



DVR-232G-K2
32-ch 2 HDD DVR

NEW

- 32-ch HD-TVI/AHD/CVI/CVBS video & 1-ch audio input
- Up to 18 channels of IP video input (up to 5 MP resolution)
- 2 SATA interface, HD 1080p Lite @ 15 fps/ch
- 380 1U case



DVR-104G-F1
4-ch 1 HDD DVR

HOT

- 4-ch HD-TVI/AHD/CVI/CVBS video & 1-ch audio input
- Up to 5 channels of IP video input (up to HD 960p resolution)
- 1 SATA interface, HD 1080p Lite @ 25 fps/ch
- Mini case



DVR-108G-F1
8-ch 1 HDD DVR

HOT

- 8-ch HD-TVI/AHD/CVI/CVBS video & 1-ch audio input
- Up to 10 channels of IP video input (up to HD 960p resolution)
- 1 SATA interface, HD 1080p Lite @ 12 fps/ch.
- Mini case




DVR-116G-F1
16-ch 1 HDD DVR

- 16-ch HD-TVI/AHD/CVI/CVBS video & 1-ch audio input
- Up to 18 channels of IP video input (up to HD 960p resolution)
- 1 SATA interface, HD 1080p Lite @ 12 fps/ch.
- Mini case

TRANSMISSION

With an incredible cost-to-performance ratio, HiLook cables and switches feature the most reliable performance for the price. The high-quality materials used in the network cables and coaxial cables make them extremely flame-resistant. The switches support a generous Power-over-Ethernet (PoE) distance – up to 250 meters – minimizing both network investment and maintenance efforts. Additionally, their 8-core technology guarantees stable power to the switches.

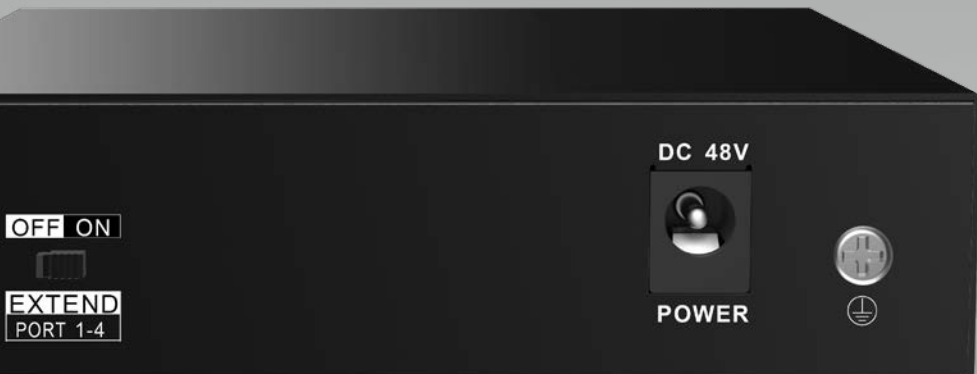



NS-0105P-35
Unmanaged PoE
Switch

- L2, Unmanaged
- 4 * 100M PoE port
- 1 * 100M uplink port
- 802.3af/at
- PoE power budget 35 W
- Max. 250 m long distance transmission



NS-0109P-58
Unmanaged PoE
Switch

- L2, Unmanaged
- 8 * 100M PoE port
- 1 * 100M uplink port
- 802.3af/at
- PoE power budget 58 W
- Max. 250 m long distance transmission



NS-0318P-135
Unmanaged PoE
Switch

- L2, Unmanaged
- 16 * 100M PoE port
- 1 * 1000M RJ45
- 1 * 1000M SFP
- 802.3af/at
- PoE power budget 135 W
- "Extend" Mode: Port 9-16, max. 250 m long distance transmission



NS-0326P-225
Unmanaged PoE
Switch

- L2, Unmanaged
- 24 * 100M PoE port
- 1 * 1000M RJ45
- 1 * 1000M SFP
- 802.3af/at
- PoE power budget 225 W
- "Extend" Mode: Port 17-24, max. 250 m long distance transmission



CC-CA2C-200B
Coaxial Cable with
power cable

- 200 m RG59 coaxial cable with power cable
- Conductor material of Coaxial cable: OFC (Oxygen Free Copper)
- Braiding material of Coaxial cable: CCA (Copper-clad Aluminum)
- Conductor material of power cable: OFC (Oxygen Free Copper)
- VW-1 flame retardant rating
- Excellent anti-interference performance
- Excellent anti-aging performance



CC-CA-200B
Coaxial Cable

- 200 m RG59 coaxial cable
- Conductor material: OFC (Oxygen Free Copper)
- Braiding material: CCA (Copper-clad Aluminum)
- VW-1 flame retardant rating
- Excellent anti-interference performance
- Excellent anti-aging performance



NC-5EAU-G
CCA CAT 5E Network
Cable






























- CAT5E, 0.5 mm, 305 m, CCA
- Transmission distance up to 85 m



NC-6AU-W
CCA CAT 6 Network
Cable

- CAT6, 0.585 mm, 305 m, CCA
- Transmission distance up to 85 m

Brackets of Network Cameras

						
B1 Series EXIR Mini Bullet	HIA-J101	D1 Series IR Dome	HIA-J204	HIA-B401-110	HIA-B401-110B	HIA-B101-110
	Junction box		Inclined ceiling mount	Wall mount	Wall mount	Pendant mount
						
	HIA-B201	HIA-P101	HIA-P103	HIA-J104-DM18	HIA-B403	
	Corner mount	Rain shade	Rain shade	Junction box	Wall mount	
						
T2 Series EXIR Mini Turret	HIA-B301	HIA-B201	HIA-J101	HIA-B401-110T		
	Vertical pole mount	Corner mount	Junction box	Wall mount		
						
B6 Series VF EXIR Bullet	HIA-B301	HIA-J102	HIA-J105	HIA-B201		
	Vertical pole mount	Junction box	Junction box	Corner mount		
						
D6 Series VF IR Dome	HIA-B101-135	HIA-B402-135	HIA-B402-135B	HIA-B302	HIA-B202	HIA-B501
	Pendant mount	Wall mount	Wall mount with junction box	Vertical pole mount	Corner mount	In-ceiling Mount The bracket should be used together with the adapter plate D20-AP (White)

						
	HIA-J104-DM21	HIA-J203-DM23	HIA-P102	HIA-P103	HIA-B404	D20-AP
	Junction box	Inclined ceiling mount	Rain shade	Rain shade	Wall mount	Adapter Plate
						
D7 Series VF EXIR Dome	HIA-B401-120	HIA-B401-120B	HIA-B101-120	HIA-B201	HIA-B301	HIA-J104-DM46
	Wall Mount	Wall Mount	Pendant Mount	Corner Mount	Vertical pole mount	Junction Box
						
T6 Series VF EXIR Turret	HIA-B402-130T	HIA-B101-130T	HIA-B301	HIA-B201	HIA-J103	HIA-J202
	Wall mount	Pendant mount	Vertical pole mount	Corner mount	Junction box	Inclined ceiling mount
Brackets of Turbo HD Cameras						
						
T1 Series (-P) (-M) IR Mini Turret	HIA-B301	HIA-B201	HIA-J101	HIA-B401-110T		
	Vertical pole mount	Corner mount	Junction box	Wall mount		
						
T2 Series (-P) IR Turret	HIA-B301	HIA-B201	HIA-J102	HIA-J201	HIA-B401-110T	
	Vertical pole mount	Corner mount	Junction box	Inclined ceiling mount	Wall mount	

						
T2 Series (-M) IR Turret	HIA-B301 Vertical pole mount	HIA-B201 Corner mount	HIA-J103 Junction box	HIA-J202 Inclined ceiling mount	HIA-B402-130T Wall mount	
						
T3 VF Series IR Turret	HIA-B301 Vertical pole mount	HIA-B201 Corner mount	HIA-J103 Junction box	HIA-J202 Inclined ceiling mount	HIA-B402-130T Wall mount	HIA-B101-130T Pendant mount
						
D3 VF Series IR Dome	HIA-B301 Vertical pole mount	HIA-B201 Corner mount	HIA-J104-DM45 Junction box	HIA-J203-DM45 Inclined ceiling mount	HIA-B402-DM45 Wall mount	HIA-B101-DM45 Pendant mount
						
	HIA-P102 Rain shade	B1/B2 Series IR Mini Bullet	HIA-J101 Junction box			
						
B3 VF Series IR Bullet	HIA-B301 Vertical pole mount	HIA-B201 Corner mount	HIA-J102 Junction box			

Brackets of PTZ Cameras

						
1-inch Mini Indoor IR PTZ	HIA-B404-PT	Mini PanoVu Series	HIA-B404-T	HIA-B101-PT10		
2.5-inch Mini Indoor PTZ without IR	Wall mount		Wall mount	Pendant mount		
						
4-inch IR PTZ	HIA-B171	HIA-B172	HIA-B173	HIA-B473	HIA-B471	HIA-B471-P
	Pendant mount	Pendant mount	Ceiling mount	Parapet wall mount	Wall mount with junction box	Vertical pole mount
						
	HIA-B471-C	HIA-B471-B	HIA-B471-BP	HIA-B471-BC	HIA-B371	HIA-B472
	Corner mount	Wall mount with junction box	Vertical pole mount with junction box	Wall mount with junction box	Gooseneck mount	Wall mount (short arm)

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA

T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia

T +7-495-669-67-99
saleru@hikvision.com

Hikvision Singapore

T +65-6684-4718
sg@hikvision.com

Hikvision France

T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Turkey

T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Thailand

T +662-275-9949
sales.thailand@hikvision.com

Hikvision Germany

T +49-69-401507290
sales.adch@hikvision.com

Hikvision Europe

T +31-23-5542770
sales.eu@hikvision.com

Hikvision Australia

T +61-2-8599-4233
salesau@hikvision.com

Hikvision Korea

T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Spain

T +34-91-737-16-55
info.es@hikvision.com

Hikvision Kazakhstan

T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Malaysia

T +6-032-7224000
sales.my@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com

Hikvision UK & Ireland

T +01628-902140
sales.uk@hikvision.com

Hikvision Italy

T +39-0438-6902
info.it@hikvision.com

Hikvision India

T +91-22-28469900
sales@pramahikvision.com

Hikvision Poland

T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Tashkent

T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Vietnam

T +84-974270888
sales.vt@hikvision.com

Hikvision Philippines

sales.ph@hikvision.com

Hikvision UAE

T +971-4-4432090
salesme@hikvision.com

Hikvision South Africa

Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Brazil

T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Canada

T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Indonesia

T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Hong Kong

T +852-2151-1761
info.hk@hikvision.com

HiLook

Product Catalog

IP Solution

Turbo HD Solution

Transmission